


啟動小鋼瓶

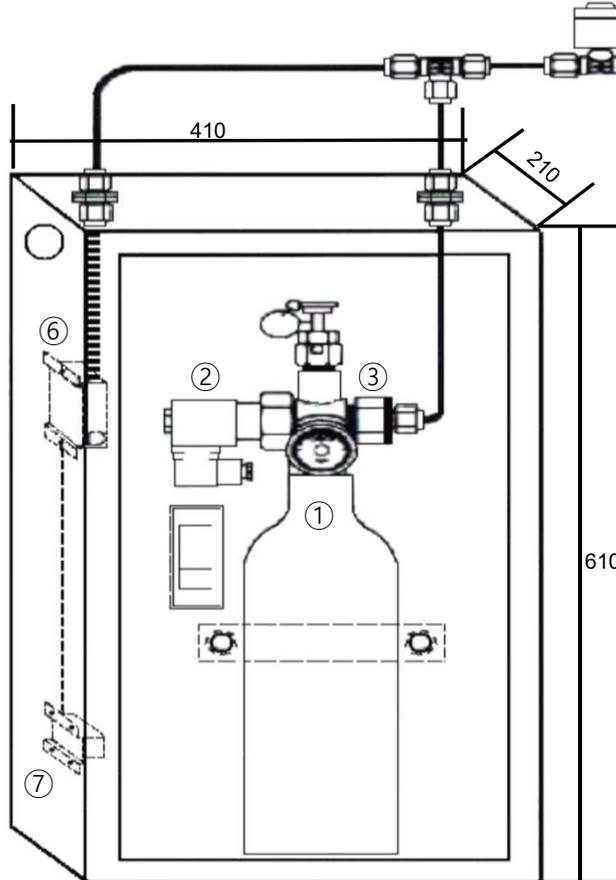

To Selection Valve or Cylinder Valve

PARTS NAME

- 1.Starting CO₂ Cylinder 鋼瓶
- 2.Starting Solenoid 電磁閥
- 3.Cylinder Valve 鋼瓶閥
- 4.Relief Valve 防止誤動作閥
- 5.Check Valve 單向逆止閥
- 6.Pressure Switch 壓力開關
- 7.Terminal 接線座

NOTE

MAXIMUM ALLOWABLE
WORKING PRESSURE **100kgf/cm²**
HYDROSTATIO TEST PRESSURE
185kgf/cm²
WORKING PRESSURE
10~110kgf/cm²
HYDROSTATIO TEST PRESSURE
250kgf/cm²



規格表

1	鋼瓶	4.0L/2.4KG
2	電磁閥	DC 24V



板大消防企業有限公司

MODEL: DAC-1S

DATE

2018.03

DRAWING NO.

SUBJECT:

Actuating Device (啟動小鋼瓶組)